

N9038A MXE EMI Receiver

3 Hz to 3.6, 8.4, 26.5, and 44 GHz

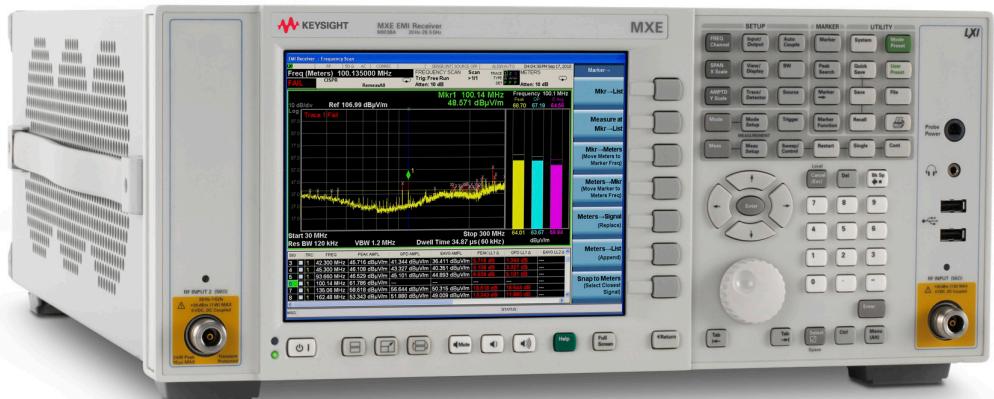


Table of Contents

Definitions and Conditions	3
Frequency and Time Specifications	4
Amplitude Accuracy and Range Specifications.....	7
Dynamic Range Specifications.....	11
PowerSuite Measurement Specifications	16
General Specifications.....	17
Input and Outputs.....	19
I/Q Analyzer	21
RTSA	23

Keep the test queue flowing

In EMC testing, success depends on tools that can help you do more in less time—today and tomorrow. That's why Keysight Technologies, Inc. created the MXE: it's a standards-compliant EMI receiver and diagnostic signal analyzer built on an upgradeable platform. In the lab and on the bench, it provides the accuracy, repeatability, and reliability you need to test with confidence. Equip your team with the MXE, and keep the test queue flowing.

Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to the full temperature range of 0 to 55 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2σ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted.

These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but are not covered by the product warranty.

The receiver will meet its specifications when:

- It is within its calibration cycle
- Under auto couple control, except when Auto Sweep Time Rules = Accy
- Signal frequencies < 10 MHz, with DC coupling applied
- The receiver has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on
- The receiver has been turned on at least 30 minutes with Auto Align set to normal, or, if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message; if the Alert condition is changed from "Time and Temperature" to one of the disabled duration choices, the receiver may fail to meet specifications without informing the user

This data sheet is a summary of the specifications and conditions for the MXE EMI receiver. For the complete specifications guide, visit:

www.keysight.com/find/mxe_specifications

Get more information

This data sheet is a summary of the specifications and conditions which are available in the MXE EMI Receiver Specification Guide (N9038-90010).

For ordering information, refer to the MXE EMI Receiver Configuration Guide (5990-7419EN).

Frequency and Time Specifications

Frequency range	DC coupled	AC coupled
Input 1		
– Option 5034	3 Hz to 3.6 GHz	10 MHz to 3.6 GHz
– Option 508	3 Hz to 8.4 GHz	10 MHz to 8.4 GHz
– Option 526	3 Hz to 26.5 GHz	10 MHz to 26.5 GHz
– Option 544	3 Hz to 44 GHz	–
Input 2	3 Hz to 1 GHz	10 MHz to 1 GHz
Band	LO multiple (N)	
0	1	3 Hz to 3.6 GHz
1	1	3.5 to 8.4 GHz
2	2	8.3 to 13.6 GHz
3	2	13.5 to 17.1 GHz
4	4	17.0 to 26.5 GHz
5	4	26.4 to 34.5 GHz
6	8	34.4 to 44 GHz
Frequency reference		
Accuracy	$\pm [(\text{time since last adjustment} \times \text{aging rate}) + \text{temperature stability} + \text{calibration accuracy}]$	
Total aging	$\pm 1 \times 10^{-7} / \text{year}$ $\pm 1.5 \times 10^{-7} / 2 \text{ years}$	
Temperature stability		
– 20 to 30 °C	$\pm 1.5 \times 10^{-8}$	
– Full temperature range	$\pm 5 \times 10^{-8}$	
Achievable initial calibration accuracy	$\pm 4 \times 10^{-8}$	
Residual FM	$\leq (0.25 \text{ Hz} \times N) \text{ p-p in 20 ms (nominal)}$	
Frequency readout accuracy (start, stop, center, marker)		
$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.25\% \times \text{span} + 5\% \times \text{RBW} + 2 \text{ Hz} + 0.5 \times \text{horizontal resolution}^1)$		
Marker frequency counter		
Accuracy	$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.100 \text{ Hz})$	
Delta counter accuracy	$\pm (\text{delta frequency} \times \text{frequency reference accuracy} + 0.141 \text{ Hz})$	
Counter resolution	0.001 Hz	
Frequency span (FFT and swept mode)		
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument	
Resolution	2 Hz	
Accuracy	<ul style="list-style-type: none"> – Stepped/Swept $\pm (0.25\% \times \text{span} + \text{horizontal resolution})$ – FFT $\pm (0.1\% \times \text{span} + \text{horizontal resolution})$ 	

1. Horizontal resolution is span/(sweep points – 1).

Sweep time and triggering			
Range	Span = 0 Hz	1 μ s to 6000 s	
	Span \geq 10 Hz	1 ms to 4000 s	
Accuracy	Span \geq 10 Hz, swept	\pm 0.01 % (nominal)	
	Span \geq 10 Hz, FFT	\pm 40 % (nominal)	
	Span = 0 Hz	\pm 0.01 % (nominal)	
Trigger	Free run, line, video, external 1, external 2, RF burst, periodic timer		
Trigger delay	Span = 0 Hz or FFT	-150 to +500 ms	
	Span \geq 10 Hz, swept	0 μ s to 500 ms	
	Resolution	0.1 μ s	
Time gating			
Gate methods	Gated LO; gated video; gated FFT		
Gate length range (except method = FFT)	100.0 ns to 5.0 s		
Gate delay range	0 to 100.0 s		
Gate delay jitter	33.3 ns p-p (nominal)		
Sweep (trace) point range			
All spans	1 to 100,001		
Resolution bandwidth (RBW)			
EMI bandwidths (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz		
EMI bandwidths (Mil STD 461 compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz		
Other bandwidths (-6 dB)	30 Hz, 300 Hz, 3 kHz, 30 kHz, 300 kHz, 3 MHz, 10 MHz		
Range (-3.01 dB bandwidth)	1 Hz to 3 MHz (10 % steps, E24 series, 24 per decade), 4, 5, 6, 8 MHz		
Bandwidth accuracy (power)	1 Hz to 750 kHz	\pm 1.0 % (\pm 0.044 dB)	
	820 kHz to 1.2 MHz (< 3.6 GHz CF)	\pm 2.0 % (\pm 0.088 dB)	
	1.3 to 2 MHz (< 3.6 GHz CF)	\pm 0.07 dB (nominal)	
	2.2 to 3 MHz (< 3.6 GHz CF)	\pm 0.15 dB (nominal)	
	4 to 8 MHz (< 3.6 GHz CF)	\pm 0.25 dB (nominal)	
Bandwidth accuracy (-3.01 dB)	1 Hz to 1.3 MHz	\pm 2 % (nominal)	
Selectivity (-60 dB/-3 dB)	4.1:1 (nominal)		
RF preselector filters			
Filter band		Filter type	6 dB BW (nominal)
20 Hz to 150 kHz		Fixed lowpass	310 kHz
150 kHz to 1 MHz		Fixed bandpass	1.7 MHz
1 to 2 MHz		Fixed bandpass	2.4 MHz
2 to 5 MHz		Fixed bandpass	7.5 MHz
5 to 8 MHz		Fixed bandpass	10 MHz
8 to 11 MHz		Fixed bandpass	9.5 MHz
11 to 14 MHz		Fixed bandpass	9.5 MHz
14 to 17 MHz		Fixed bandpass	10 MHz
17 to 20 MHz		Fixed bandpass	9.5 MHz
20 to 24 MHz		Fixed bandpass	9.5 MHz
24 to 30 MHz		Fixed bandpass	9.0 MHz
30 to 70 MHz		Tracking bandpass	10 MHz
70 to 150 MHz		Tracking bandpass	24 MHz
150 to 300 MHz		Tracking bandpass	28 MHz
300 to 600 MHz		Tracking bandpass	50 MHz
600 MHz to 1 GHz		Tracking bandpass	60 MHz
1 to 2 GHz		Tracking bandpass	180 MHz
2 to 3.6 GHz		Fixed highpass	1.89 GHz (-3 dB corner frequency)

Analysis bandwidth¹		
Maximum bandwidth	Option B25	25 MHz
	Standard	10 MHz
Video bandwidth (VBW)		
Range	1 Hz to 3 MHz (10 % steps, E24 series 24 per decade), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)	
Accuracy	± 6 % (nominal)	
Measurement speed²		
Local measurement and display update rate	4 ms (250/s) (nominal)	
Remote measurement and LAN transfer rate	5 ms (200/s) (nominal)	
Marker peak search	1.5 ms (nominal)	
Center frequency tune and transfer (RF)	20 ms (nominal)	
Center frequency tune and transfer (μW)	47 ms (nominal)	
Measurement/mode switching	39 ms (nominal)	
Time domain sweep times		
CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 100 ms, peak detector	12.1 s (nominal)	
CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 1 s, quasi-peak detector	181.7 s (nominal)	
CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 10 ms, peak detector	3.1 s (nominal)	
CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 1 s, quasi-peak detector	18.1 s (nominal)	
CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 1 s, quasi-peak detector	211.5 s (nominal)	

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.
2. Sweep points = 101.

Amplitude Accuracy and Range Specifications

Amplitude range						
Measurement range	Displayed average noise level (DANL) to maximum safe input level					
Input attenuator range	0 to 70 dB in 2 dB steps					
Maximum safe input level (with and without preamp)						
Average total power	+30 dBm (1 W)	+30 dBm (1 W)				
Peak pulse power	+45 dBm (31.6 W)	+50 dBm (100 W)	< 10 µs pulse width, < 1 % duty cycle and input attenuation \geq 30 dB			
Surge power	+2k W			(10 µs pulse width)		
DC volts						
– DC coupled	± 0.2 Vdc	± 0.2 Vdc				
– AC coupled	± 100 Vdc	± 100 Vdc				
Display range						
Log scale	0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)					
Linear scale	10 divisions					
Scale units	dBm, dBmV, dBµV, dBmA, dBµA, V, W, A dBuV/m, dBuA/m, dBpt, dBG, dBpW					
Frequency response		Specification	95th percentile ($\approx 2\sigma$)			
		Option 503, 508, or 526 (RF/µW)	Option 544 (mmW)	Option 503, 508, or 526 (RF/µW)		
(10 dB input attenuation, 20 to 30 °C, preselector centering applied, σ = nominal standard deviation)						
RF preselector off, preamp off	3 Hz to 20 Hz		± 0.25 dB (nominal)	± 0.25 dB (nominal)		
	20 Hz to 10 MHz ¹	± 0.6 dB	± 0.22 dB	± 0.25 dB		
	10 to 50 MHz	± 0.65 dB	± 0.22 dB	± 0.21 dB		
	50 MHz to 3.6 GHz	± 0.65 dB	± 0.22 dB	± 0.15 dB		
	3.5 to 5.2 GHz	± 1.5 dB	± 0.47 dB	± 0.6 dB		
	5.2 to 8.4 GHz	± 1.5 dB	± 0.47 dB	± 0.57 dB		
	8.3 to 13.6 GHz	± 1.5 dB	± 0.46 dB	± 0.54 dB		
	13.5 to 17.1 GHz	± 1.5 dB	± 0.53 dB	± 0.64 dB		
	17 to 18 GHz	± 1.5 dB	± 0.57 dB	± 0.72 dB		
	18 to 22 GHz	± 1.7 dB	± 0.64 dB	± 0.72 dB		
	22 to 26.5 GHz	± 1.7 dB	± 0.61 dB	± 0.71 dB		
	26.4 to 34.5 GHz	± 2.5 dB		± 0.93 dB		
	34.4 to 44 GHz	± 3.2 dB		± 1.24 dB		
RF preselector off, preamp on (0 dB attenuation)	100 kHz to 3.6 GHz ¹	± 0.75 dB	± 0.29 dB			
	100 kHz to 10 MHz		± 0.75 dB	± 0.43 dB		
	10 to 50 MHz		± 0.75 dB	± 0.29 dB		
	50 MHz to 3.6 GHz		± 0.75 dB	± 0.31 dB		
	3.5 to 8.4 GHz	± 1.85 dB	± 0.63 dB			
	3.5 to 5.2 GHz		± 2.2 dB	± 0.9 dB		
	5.2 to 8.4 GHz		± 1.85 dB	± 0.7 dB		
	8.3 to 13.6 GHz	± 1.95 dB	± 0.64 dB	± 0.79 dB		
	13.5 to 17.1 GHz	± 1.8 dB	± 0.81 dB	± 0.88 dB		
	17 to 18 GHz	± 2.0 dB	± 0.95 dB			
	18 to 22 GHz	± 2.85 dB	± 1.23 dB			
	17 to 22 GHz		± 2.85 dB	± 1.07 dB		
	22 to 26.5 GHz	± 2.6 dB	± 1.37 dB	± 1.03 dB		
	26.4 to 34.5 GHz		± 3.0 dB	± 1.35 dB		
	34.4 to 44 GHz		± 4.1 dB	± 1.69 dB		

- DC coupling required to meet specifications below 50 MHz. With AC coupling, specifications apply at frequencies of 50 MHz and higher. Statistical observations at 10 MHz with AC coupling show that most instruments meet the DC-coupled specifications, however, a small percentage of instruments are expected to have errors exceeding 0.5 dB at 10 MHz at the temperature extreme. The effect at 20 to 50 MHz is negligible but not warranted.

Frequency response (Continued)		Specification		95th percentile ($\approx 2\sigma$)	
		Option 503, 508, or 526 (RF/ μ W)	Option 544 (mmW)	Option 503, 508, or 526 (RF/ μ W)	Option 544 (mmW)
RF preselector on, preamp off	3 Hz to 20 Hz			± 0.3 dB (nominal)	± 0.3 dB (nominal)
	20 Hz to 300 MHz ¹	± 0.65 dB	± 0.65 dB	± 0.30 dB	± 0.3 dB
	300 MHz to 1 GHz	± 0.65 dB	± 0.65 dB	± 0.28 dB	± 0.28 dB
	1 to 3.6 GHz	± 0.85 dB	± 0.85 dB	± 0.36 dB	± 0.36 dB
	3.5 to 8.4 GHz	± 1.5 dB		± 0.47 dB	
	3.5 to 5.2 GHz		± 1.6 dB		± 0.6 dB
	5.2 to 8.4 GHz		± 1.5 dB		± 0.57 dB
	8.3 to 13.6 GHz	± 1.5 dB	± 1.5 dB	± 0.46 dB	± 0.54 dB
	13.5 to 17.1 GHz	± 1.5 dB	± 1.5 dB	± 0.53 dB	± 0.64 dB
	17 to 18 GHz	± 1.5 dB	± 1.7 dB	± 0.57 dB	± 0.72 dB
	18 to 22 GHz	± 1.7 dB	± 1.7 dB	± 0.64 dB	± 0.72 dB
	22 to 26.5 GHz	± 1.7 dB	± 1.7 dB	± 0.61 dB	± 0.71 dB
	26.4 to 34.5 GHz		± 2.5 dB		± 0.93 dB
	34.4 to 44 GHz		± 3.2 dB		± 1.24 dB
RF preselector on, preamp on (0 dB attenuation)	1 kHz to 30 MHz ¹	± 0.8 dB	± 0.8 dB	± 0.36 dB	± 0.36 dB
	30 to 300 MHz ¹	± 0.7 dB	± 0.70 dB	± 0.29 dB	± 0.29 dB
	300 MHz to 1 GHz	± 0.65 dB	± 0.65 dB	± 0.30 dB	± 0.30 dB
	1 to 2.75 GHz	± 0.95 dB	± 0.95 dB	± 0.45 dB	± 0.45 dB
	2.75 to 3.6 GHz	± 1.15 dB	± 1.15 dB	± 0.55 dB	± 0.55 dB
	3.5 to 8.4 GHz	± 1.85 dB		± 0.63 dB	
	3.5 to 5.2 GHz		± 2.2 dB		± 0.9 dB
	5.2 to 8.4 GHz		± 1.85 dB		± 0.7 dB
	8.3 to 13.6 GHz	± 1.95 dB	± 1.95 dB	± 0.64 dB	± 0.79 dB
	13.5 to 17.1 GHz	± 1.8 dB	± 1.8 dB	± 0.81 dB	± 0.88 dB
	17 to 18 GHz	± 2.0 dB	± 2.85 dB	± 0.95 dB	± 1.07 dB
	18 to 22 GHz	± 2.85 dB	± 2.85 dB	± 1.23 dB	± 1.07 dB
	22 to 26.5 GHz	± 2.6 dB	± 2.6 dB	± 1.37 dB	± 1.03 dB
	26.4 to 34.5 GHz		± 3.0 dB		± 1.35 dB
	34.4 to 44 GHz		± 4.1 dB		± 1.69 dB

1. DC coupling required to meet specifications below 50 MHz. With AC coupling, specifications apply at frequencies of 50 MHz and higher. Statistical observations at 10 MHz with AC coupling show that most instruments meet the DC-coupled specifications, however, a small percentage of instruments are expected to have errors exceeding 0.5 dB at 10 MHz at the temperature extreme. The effect at 20 to 50 MHz is negligible but not warranted.

Input attenuation switching uncertainty		Specifications		95th percentile ($\approx 2\sigma$)	
Attenuation > 2 dB , preamp off	50 MHz (reference frequency)	± 0.20 dB		± 0.08 dB (typical)	
Relative to 10 dB (reference setting)					
Absolute amplitude accuracy		Specifications		95th percentile ($\approx 2\sigma$)	
(10 dB attenuation, 20 to 30 °C, 1 Hz \leq RBW \leq 1 MHz, input signal -10 to -50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation)					
RF preselector off and on, preamp off and on					
RF input 1 to 44 GHz	At 50 MHz	± 0.33 dB		± 0.25 dB	
	At all frequencies	$\pm (0.33 \text{ dB} + \text{frequency response})$			
RF input 2 to 1 GHz	At 50 MHz	± 0.36 dB		± 0.27 dB	
	At all frequencies	$\pm (0.36 \text{ dB} + \text{frequency response})$			

Input voltage standing wave ratio (VSWR)		Input attenuation 0 dB	Input attenuation ≥ 10 dB		
RF preselector off, preamp on and off					
DC coupled	1 to 18 GHz 18 to 26.5 GHz 26.5 to 40 GHz 40 to 44 GHz	3.0:1 3.0:1 3.0:1 —	2.0:1 2.0:1 2.5:1 —		
AC coupled	1 to 18 GHz 18 to 26.5 GHz	3.0:1 3.0:1	2.0:1 2.4:1		
RF preselector on, preamp on and off					
DC coupled	9 kHz to 1 GHz 1 to 26.5 GHz 26.5 to 40 GHz 40 to 44 GHz	2.0:1 3.0:1 3.0:1 —	1.2:1 2.0:1 2.5:1 —		
AC coupled	50 MHz to 1 GHz 1 to 18 GHz 18 to 26.5 GHz	2.0:1 3.0:1 3.0:1	1.2:1 2.0:1 2.4:1		
Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)					
1 Hz to 1.5 MHz RBW	± 0.05 dB				
1.6 to 3 MHz RBW	± 0.10 dB				
4, 5, 6, 8 MHz RBW	± 1.0 dB				
Reference level					
Range					
– Log scale	–170 to +30 dBm in 0.01 dB steps				
– Linear scale	Same as log (707 pV to 7.07 V)				
Accuracy	0 dB				
Display scale switching uncertainty					
Switching between linear and log	0 dB				
Log scale/div switching	0 dB				
Display scale fidelity					
Between –10 dBm and –80 dBm input mixer level	± 0.10 dB total				
Total measurement uncertainty ¹		95th percentile ($\approx 2\sigma$)			
Signal level 0 to 90 dB below reference point, RF attenuation 0 to 40 dB, RBW \leq 3 MHz, 20° to 30° C: AC coupled 10 MHz to 26.5 GHz					
DC coupled 9 kHz to 40 GHz					
		Option 503, 508, or 526 (RF/ μ W)	Option 544 (mmW)		
RF preselector off, preamp off	1 kHz to 2 GHz 2 to 3.6 GHz 3.6 to 8 GHz 8 to 18 GHz 18 to 26.5 GHz 26.5 to 40 GHz 40 to 44 GHz	± 0.50 dB ± 0.60 dB ± 0.80 dB ± 1.10 dB ± 1.60 dB ± 1.70 dB ± 2.30 dB	± 0.50 dB ± 0.60 dB ± 1.70 dB ± 1.30 dB ± 1.60 dB ± 1.70 dB ± 2.30 dB		
RF preselector off, preamp on	100 kHz to 2 GHz 2 to 3.6 GHz 3.6 to 8 GHz 8 to 18 GHz 18 to 26.5 GHz 26.5 to 40 GHz 40 to 44 GHz	± 0.60 dB ± 0.60 dB ± 1.10 dB ± 1.30 dB ± 1.90 dB ± 1.90 dB ± 2.40 dB	± 0.60 dB ± 0.60 dB ± 1.80 dB ± 1.30 dB ± 1.90 dB ± 1.90 dB ± 2.40 dB		

1. Specified for instruments with prefixes MY/SG5322 or greater.

Total measurement uncertainty¹		95th percentile ($\approx 2\sigma$)	
(Continued)			
RF preselector on, preamp off	9 kHz to 2 GHz	± 0.50 dB	± 0.50 dB
	2 to 3.6 GHz	± 0.50 dB	± 0.50 dB
	3.6 to 8 GHz	± 0.80 dB	± 1.70 dB
	8 to 18 GHz	± 1.10 dB	± 1.30 dB
	18 to 26.5 GHz	± 1.60 dB	± 1.60 dB
	26.5 to 40 GHz		± 1.70 dB
	40 to 44 GHz		± 2.30 dB
RF preselector on, preamp on	9 kHz to 2 GHz	± 0.50 dB	± 0.50 dB
	2 to 3.6 GHz	± 0.70 dB	± 0.70 dB
	3.6 to 8 GHz	± 1.10 dB	± 1.80 dB
	8 to 18 GHz	± 1.30 dB	± 1.30 dB
	18 to 26.5 GHz	± 1.90 dB	± 1.90 dB
	26.5 to 40 GHz		± 1.90 dB
	40 to 44 GHz		± 2.40 dB
Trace detectors			
Normal, peak, sample, negative peak, log power average, RMS average, and voltage average			
CISPR detectors: quasi-peak, EMI-avg, RMS-avg			
Preamplifier			
Gain			
– RF preselector off	100 kHz to 3.6 GHz	$+20$ dB (nominal)	
	3.6 to 26.5 GHz	$+35$ dB (nominal)	
	26.5 to 44 GHz	$+40$ dB (nominal)	
– RF preselector on	9 kHz to 3.6 GHz	$+20$ dB (nominal)	
	3.6 to 26.5 GHz	$+35$ dB (nominal)	
	26.5 to 44 GHz	$+40$ dB (nominal)	
Amplitude probability distribution			
Dynamic range	> 70 dB		
Amplitude accuracy	$< \pm 2.7$ dB		
Maximum measureable time period (no dead time)	2 minutes		
Minimum measureable probability	10^{-7}		
Amplitude level assignment	1000 levels		
Sampling rate	≥ 10 MSa/s (within a 1 MHz RBW)		
Amplitude resolution	0.1881 dB		

1. Specified for instruments with prefixes MY/SG5322 or greater.

Dynamic Range Specifications

1 dB gain compression		Specification	Typical	
Frequency range		Maximum power at mixer	Option 503, 508, or 526 (RF/ μ W)	Option 544 (mmW)
RF Input 1 to 44 GHz (RF Input 2 to 1 GHz, performance = RF Input 1 performance + 9 dB)				
RF preselector on and off, preamp off	9 kHz to 10 MHz		+4 dBm (nominal)	+4 dBm (nominal)
	10 to 500 MHz	0 dBm	+3 dBm (typical)	+3 dBm (typical)
	500 MHz to 3.6 GHz	+1 dBm	+5 dBm (typical)	+5 dBm (typical)
	3.6 to 26.5 GHz	0 dBm	+4 dBm (typical)	+4 dBm (typical)
	26.4 to 44 GHz	-1 dBm		+2 dBm (nominal)
RF preselector off, preamp on	10 MHz to 3.6 GHz		-13 dBm (nominal)	-13 dBm (nominal)
	3.6 to 26.5 GHz			
	Tone spacing 100 kHz to 20 MHz		-26 dBm (nominal)	-30 dBm (nominal)
	Tone spacing > 70 MHz		-16 dBm (nominal)	-16 dBm (nominal)
	26.4 to 44 GHz			-30 dBm (nominal)
RF preselector on, preamp on	9 kHz to 10 MHz		-16 dBm (nominal)	-16 dBm (nominal)
	10 to 2 GHz		-18 dBm (typical)	-21 dBm (typical)
	2 GHz to 3.6 GHz		-16 dBm (typical)	-17 dBm (typical)
	3.6 to 26.5 GHz			
	Tone spacing, 100 kHz to 20 MHz		-26 dBm (nominal)	-30 dBm (nominal)
	Tone spacing > 70 MHz		-16 dBm (nominal)	-16 dBm (nominal)
	26.4 to 44 GHz			-30 dBm (nominal)
Displayed average noise level (DANL)				
(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C)				
RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB				
		Specification	Typical including NFE ¹	
RF preselector off, preamp off	3 Hz to 10 Hz	—	-97 dBm (nominal) ³	
	20 Hz ²	-97 dBm	—	
	100 Hz ²	-106 dBm	—	
	1 kHz ²	-118 dBm	—	
	9 kHz	-119 dBm	—	
	100 kHz	-131 dBm	—	
	1 MHz	-150 dBm	—	
	10 MHz to 2.1 GHz	-150 dBm	-158 dBm	
	2.1 to 3.6 GHz	-148 dBm	-157 dBm	
	3.5 to 8.4 GHz	-148 dBm	-159 dBm	
	Option 544	-145 dBm	-153 dBm	
	8.3 to 13.6 GHz	-147 dBm	-158 dBm	
	Option 544	-147 dBm	-156 dBm	
	13.5 to 17.1 GHz	-141 dBm	-151 dBm	
	17.0 to 20.0 GHz	-142 dBm	-152 dBm	
	20.0 to 26.5 GHz	-135 dBm	-146 dBm	
	26.4 to 34.5 GHz	-141 dBm	-148 dBm	
	34.4 to 44 GHz	-135 dBm	-143 dBm	
RF preselector off, preamp on	100 kHz	-144 dBm	—	
	1 MHz	-162 dBm	—	
	10 MHz to 2.1 GHz	-163 dBm	-175 dBm	
	2.1 to 3.6 GHz	-161 dBm	-173 dBm	
	3.5 to 8.4 GHz	-164 dBm	-172 dBm	
	Option 544	-161 dBm	-166 dBm	
	8.3 to 13.6 GHz	-162 dBm	-173 dBm	
	Option 544	-161 dBm	-170 dBm	
	13.5 to 17.1 GHz	-160 dBm	-171 dBm	
	17.0 to 20.0 GHz	-158 dBm	-165 dBm	
	20.0 to 26.5 GHz	-155 dBm	-162 dBm	
	26.4 to 34.5 GHz	-156 dBm	-164 dBm	
	34.4 to 44 GHz	-150 dBm	-158 dBm	

1. Typical Indicated Noise including NFE = typical DANL+ Bandwidth and Log corrections-DANL improvement with NFE.

2. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

3. No NFE at this frequency.

Displayed average noise level (DANL) (Continued)

(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C)

RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB

		Specification	Typical including NFE ¹
RF preselector on, preamp off	3 to 10 Hz	–	-92 dBm (nominal) ²
	20 Hz ³	-92 dBm	-100 dBm ²
	100 Hz ³	-101 dBm	-109 dBm ²
	1 kHz ³	-114 dBm	-120 dBm ²
	9 kHz	-118 dBm	-132 dBm
	100 kHz	-130 dBm	-143 dBm
	1 to 3 MHz	-147 dBm	-158 dBm
	3 to 30 MHz	-150 dBm	-160 dBm
	30 to 300 MHz	-151 dBm	-161 dBm
	300 to 600 MHz	-153 dBm	-164 dBm
	600 MHz to 1 GHz	-151 dBm	-162 dBm
	1 to 2 GHz	-150 dBm	-161 dBm
	2 to 2.5 GHz	-152 dBm	-164 dBm
	2.5 to 3 GHz	-151 dBm	-163 dBm
	3 to 3.6 GHz	-148 dBm	-161 dBm
	3.5 to 8.4 GHz	-148 dBm	-159 dBm
	– Option 544	-145 dBm	-153 dBm
	8.3 to 13.6 GHz	-147 dBm	-158 dBm
	– Option 544	-147 dBm	-156 dBm
	13.5 to 17.1 GHz	-141 dBm	-151 dBm
	17.0 to 20.0 GHz	-142 dBm	-152 dBm
	20.0 to 26.5 GHz	-135 dBm	-146 dBm
	26.4 to 34.5 GHz	-141 dBm	-148 dBm
	34.4 to 44 GHz	-135 dBm	-143 dBm
RF preselector on, preamp on	1 kHz ³	-119 dBm	-133 dBm ²
	9 kHz	-143 dBm	-154 dBm
	100 kHz	-154 dBm	-165 dBm
	1 to 2 MHz	-166 dBm	-178 dBm
	2 to 30 MHz	-158 dBm	-167 dBm
	30 to 600 MHz	-159 dBm	-166 dBm
	600 to 800 MHz	-157 dBm	-166 dBm
	800 MHz to 1 GHz	-158 dBm	-167 dBm
	1 to 2 GHz	-156 dBm	-164 dBm
	2 to 2.75 GHz	-160 dBm	-168 dBm
	2.75 to 3.6 GHz	-157 dBm	-165 dBm
	3.5 to 8.4 GHz	-164 dBm	-172 dBm
	– Option 544	-161 dBm	-166 dBm
	8.3 to 13.6 GHz	-162 dBm	-173 dBm
	– Option 544	-161 dBm	-170 dBm
	13.5 to 17.1 GHz	-160 dBm	-171 dBm
	17.0 to 20.0 GHz	-158 dBm	-165 dBm
	20.0 to 26.5 GHz	-155 dBm	-162 dBm
	26.4 to 34.5 GHz	-156 dBm	-164 dBm
	34.4 to 44 GHz	-150 dBm	-158 dBm

1. Typical DANL including NFE = Typical DANL-DANL improvement with NFE.

2. No NFE factor at this frequency.

3. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

Indicated noise in CISPR BW

Calculated from DANL data; EMI-AVG detector, 0 dB input attenuation; indicated RBW is CISPR RBW

RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB

		Typical including NFE ¹
RF preselector on, preamp off	3 to 10 Hz (1 Hz RBW) ³	+17 dBuV ² (nominal)
	20 Hz (1 Hz) ³	+9 dBuV ²
	100 Hz (10 Hz) ³	+10 dBuV ²
	1 kHz (100 Hz) ³	+9 dBuV ²
	9 kHz (200 Hz)	-2 dBuV
	100 kHz (200 Hz)	-13 dBuV
	1 to 3 MHz (9 kHz)	-11 dBuV
	3 to 30 MHz (9 kHz)	-13 dBuV
	30 to 300 MHz (120 kHz)	-3 dBuV
	300 to 600 MHz (120 kHz)	-6 dBuV
	600 MHz to 1 GHz (120 kHz)	-4 dBuV
	1 to 2 GHz (1 MHz)	+6 dBuV
	2 to 2.5 GHz (1 MHz)	+3 dBuV
	2.5 to 3 GHz (1 MHz)	+4 dBuV
	3 to 3.6 GHz (1 MHz)	+6 dBuV
	3.5 to 8.4 GHz (1 MHz)	+8 dBuV
	– Option 544	+14 dBuV
	8.3 to 13.6 GHz (1 MHz)	+9 dBuV
	– Option 544	+11 dBuV
	13.5 to 17.1 GHz (1 MHz)	+16 dBuV
	17.0 to 20.0 GHz (1 MHz)	+15 dBuV
	20.0 to 26.5 GHz (1 MHz)	+21 dBuV
	26.4 to 34.5 GHz (1 MHz)	+19 dBuV
	34.4 to 44 GHz (1 MHz)	+24 dBuV
RF preselector on, preamp on	1 kHz (100 Hz RBW) ³	-4 dBuV ²
	9 kHz (200 Hz)	-24 dBuV
	100 kHz (200 Hz)	-35 dBuV
	1 to 2 MHz (9 kHz)	-31 dBuV
	2 to 30 MHz (9 kHz)	-20 dBuV
	30 to 600 MHz (120 kHz)	-8 dBuV
	600 to 800 MHz (120 kHz)	-8 dBuV
	800 MHz to 1 GHz (120 kHz)	-9 dBuV
	1 to 2 GHz (1 MHz)	+3 dBuV
	2 to 2.75 GHz (1 MHz)	-1 dBuV
	2.75 to 3.6 GHz (1 MHz)	+2 dBuV
	3.5 to 8.4 GHz (1 MHz)	-5 dBuV
	– Option 544	-1 dBuV
	8.3 to 13.6 GHz (1 MHz)	-6.0 dBuV
	– Option 544	-4 dBuV
	13.5 to 17.1 GHz (1 MHz)	-4 dBuV
	17.0 to 20.0 GHz (1 MHz)	+2 dBuV
	20.0 to 26.5 GHz (1 MHz)	+5 dBuV
	26.4 to 34.5 GHz (1 MHz)	+3 dBuV
	34.4 to 44 GHz (1 MHz)	+9 dBuV

1. Typical Indicated Noise including NFE = Typical DANL+ Bandwidth and Log corrections-DANL improvement with NFE.

2. No NFE factor at this frequency.

3. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

Spurious responses

RF Input 1; RF preselector on and off

	Source frequency	Specification	Typical
Residual responses ¹ (Input terminated and 0 dB attenuation)	200 kHz to 8.4 GHz (swept) Zero span or FFT or other frequencies	-100 dBm -100 dBm (nominal)	
Image responses $f \pm 645$ MHz	10 MHz to 3.6 GHz 3.5 to 13.6 GHz 13.5 to 17.1 GHz 17.0 to 22 GHz 22 to 26.5 GHz 26.5 to 34.5 GHz ³ 34.4 to 44 GHz ³	-80 dBc -78 dBc -74 dBc -70 dBc -68 dBc -70 dBc -60 dBc	-108 dBc -88 dBc -85 dBc -82 dBc -78 dBc -94 dBc -79 dBc
LO related spurious – ($f > 600$ MHz from carrier)	10 MHz to 3.6 GHz		-90 dBc + 20xlogN ²
Other spurious – $f \geq 10$ MHz from carrier	Carrier frequency ≤ 26.5 GHz Carrier frequency > 26.5 GHz	-80 dBc + 20xlogN ²	-90 dBc (nominal)

Second harmonic distortion (SHI)

RF Input 1; input power -9 dBm, input attenuation 6 dB; RF Input 2 to 1 GHz. RF Input 2 performance = RF Input 1 performance +9 dB

	Source frequency	Specification	Typical
RF preselector off, preamp off	10 MHz to 1.0 GHz 1.0 to 1.8 GHz 1.8 to 6.8 GHz Option 544 1.8 to 3 GHz 3 to 6.8 GHz 6.8 to 11 GHz 11 to 13.25 GHz 13.2 to 22 GHz (Option 544)	+45 dBm +41 dBm +65 dBm +58 dBm +60 dBm +55 dBm +50 dBm +44 dBm	+54 dBm +50 dBm +68 dBm +64 dBm +69 dBm +64 dBm +60 dBm +51 dBm
RF preselector off, preamp on – Preamp power = -45 dBm – Preamp power = -50 dBm	10 MHz to 1.8 GHz 1.8 to 13.25 GHz 13.2 to 22 GHz (Option 544)		+33 dBm (nominal) +10 dBm (nominal) +0 dBm (nominal)
RF preselector on, preamp off	10 to 30 MHz 30 to 500 MHz 500 MHz to 1 GHz 1 to 1.6 GHz 1.6 to 1.8 GHz 1.8 to 6.8 GHz Option 544 1.8 to 3 GHz 3 to 6.8 GHz 6.8 to 11 GHz 11 to 13.25 GHz 13.2 to 22 GHz (Option 544)	+47 dBm +57 dBm +45 dBm +58 dBm +46 dBm +65 dBm +58 dBm +60 dBm +55 dBm +50 dBm +44 dBm	+50 dBm +63 dBm +47 dBm +70 dBm +52 dBm +68 dBm +64 dBm +69 dBm +64 dBm +60 dBm +51 dBm
RF preselector on, preamp on, – Input power = -9 dBm – Attenuation = 26 dB – Preamp power = -50 dBm	10 to 300 MHz 300 to 500 MHz 500 MHz to 1 GHz 1 to 1.6 GHz 1.6 to 1.8 GHz 1.8 to 13.25 GHz 13.2 to 22 GHz (Option 544)		+53 dBm (nominal) +58 dBm (nominal) +47 dBm (nominal) +53 dBm (nominal) +30 dBm (nominal) +10 dBm (nominal) +0 dBm (nominal)

1. RF2 performance = RF1 performance +11 dB.

2. N is the LO multiplication factor.

3. Mixer level -30 dBm.

Third-order intermodulation distortion (TOI)

(Two -14 dBm tones at input and 4 dB of input attenuation; tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C, see Specifications Guide for IF prefilter bandwidths); RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +9 dB

		TOI	TOI (typical)
RF preselector off, preamp off	10 to 100 MHz	+12 dBm	+17 dBm
	100 to 400 MHz	+15 dBm	+20 dBm
	400 MHz to 1.7 GHz	+16 dBm	+20 dBm
	1.7 to 3.6 GHz	+16 dBm	+19 dBm
	3.5 to 8.4 GHz	+15 dBm	+18 dBm
	8.3 to 13.6 GHz	+15 dBm	+18 dBm
	13.5 to 26.5 GHz	+10 dBm	+14 dBm
RF preselector off, preamp on	26.4 to 44 GHz	+10 dBm	+13 dBm
	10 to 500 MHz		+4 dBm (nominal)
	500 MHz to 3.6 GHz		+5 dBm (nominal)
	3.6 to 26.5 GHz		-15 dBm (nominal)
RF preselector on, preamp off	26.4 to 44 GHz		-17 dBm (nominal)
	10 to 30 MHz	+12 dBm	+16 dBm
	30 MHz to 1 GHz	+12.5 dBm	+15 dBm
	1 to 1.5 GHz	+12.5 dBm	+14 dBm
	1.5 to 3.6 GHz	+14.5 dBm	+16 dBm
	3.5 to 8.4 GHz	+15 dBm	+18 dBm
	8.3 to 13.6 GHz	+15 dBm	+18 dBm
RF preselector on, preamp on	13.5 to 26.5 GHz	+10 dBm	+14 dBm
	26.4 to 44 GHz (Option 544)	+10 dBm	+13 dBm
	10 to 30 MHz	-9 dBm	-5 dBm
	30 MHz to 1 GHz	-9 dBm	-4 dBm
	1 to 2 GHz	-4 dBm	-2 dBm
Phase noise ²	2 to 3.6 GHz	-6 dBm	-3 dBm
	3.6 to 26.5 GHz		-15 dBm (nominal)
	26.4 to 44 GHz (Option 544)		-17 dBm (nominal)
	Offset	Specification	Typical
Noise sidebands			
– (20 to 30 °C, CF = 1 GHz)	10 Hz	–	-80 dBc/Hz (nominal)
	100 Hz	-91 dBc/Hz	-100 dBc/Hz
	1 kHz		-112 dBc/Hz (nominal)
	10 kHz	-113 dBc/Hz	-114 dBc/Hz
	100 kHz	-116 dBc/Hz	-117 dBc/Hz
	1 MHz	-135 dBc/Hz	-136 dBc/Hz
	10 MHz		-148 dBc/Hz (nominal)

1. Preamp input power = input power-input attenuation (-9 dB for input 2).
2. For nominal values, refer to Figure 1.

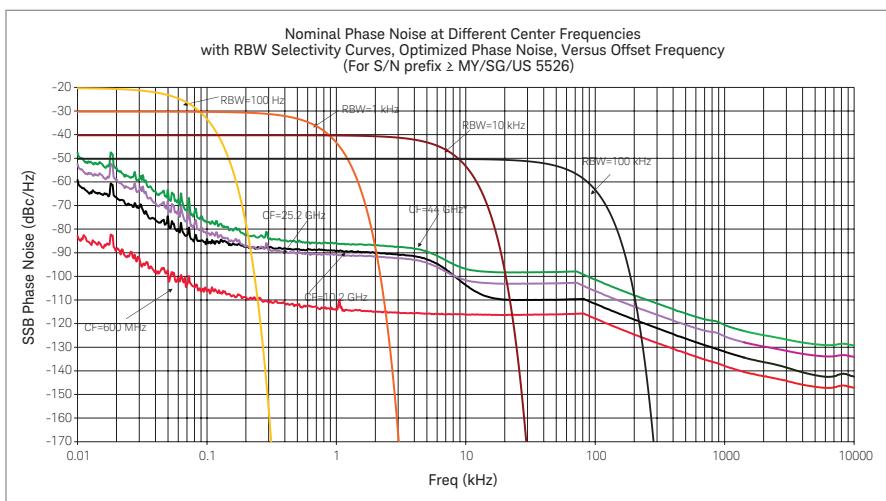


Figure 1. Nominal phase noise at different center frequencies.

PowerSuite Measurement Specifications

Channel power

Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB) ± 0.82 dB (± 0.23 dB 95th percentile)

Occupied bandwidth

Frequency accuracy \pm [span/1000] (nominal)

Adjacent channel power

Accuracy, W-CDMA (ACLR)

(at specific mixer levels and ACLR ranges)	Adjacent	Alternate
– MS	± 0.14 dB	± 0.21 dB
– BTS	± 0.49 dB	± 0.44 dB

Dynamic range (typical)

– Without noise correction	-73 dB	-79 dB
– With noise correction	-78 dB	-82 dB

Offset channel pairs measured

1 to 6

ACP measurement and transfer time (fast method)

14 ms (nominal) ($\sigma = 0.2$ dB)

Multiple number of carriers measured

Up to 12

Power statistics CCDF

Histogram resolution

0.01 dB

Harmonic distortion

Maximum harmonic number

10th

Result

Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in %

Intermod (TOI)

Measure the third-order products and intercepts from two tones

Burst power

Methods

Power above threshold, power within burst width

Results

Single burst output power, average output power, maximum power, minimum power within burst, burst width

Spurious emission

W-CDMA (1 to 3.6 GHz) table-driven spurious signals;

search across regions

– Dynamic range	96.7 dB	101.7 dB (typical)
– Absolute sensitivity	-85.4 dBm	

Spectrum emission mask (SEM)

cdma2000® (750 kHz offset)

– Relative dynamic range (30 kHz RBW)	78.9 dB	85 dB (typical)
– Absolute sensitivity	-100.7 dBm	
– Relative accuracy	± 0.12 dB	

3GPP W-CDMA (2.515 MHz offset)

– Relative dynamic range (30 kHz RBW)	81.9 dB	88.2 dB (typical)
– Absolute sensitivity	-100.7 dBm	
– Relative accuracy	± 0.12 dB	

General Specifications

Temperature range	
Operating	0 to 55 °C
Storage	-40 to 70 °C
EMC	
Complies with European EMC Directive 2004/108/EC	
- IEC/EN 61326-2-1	
- CISPR Pub 11 Group 1, class B	
- AS/NZS CISPR 11	
- ICES/NMB-001	
This ISM device complies with Canadian ICES-001	
Cet appareil ISM est conforme à la norme NMB-001 du Canada	
Radio disturbance measuring apparatus	
CISPR 16-1-1	The features in this instrument comply with the performance requirements of this basic standard ¹
Safety	
Complies with European Low Voltage Directive 2006/95/EC	
- IEC/EN 61010-1 2nd Edition	
- Canada: CSA C22.2 No. 61010-01-04	
- USA: UL 61010-1 2nd Edition	
Acoustic noise emission	
LpA < 70 dB	LpA < 70 dB
Operator position	Am Arbeitsplatz
Normal position	Normaler Betrieb
Per ISO 7779	Nach DIN 45635 t.19
Environmental stress	
Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3	

1. The use of Noise Floor Extension (NFE) is required to meet the “isolated pulse” test case in Bands B, C, and D. In addition, when making measurements in Band B below 160 kHz using time domain scans or making measurements using meters in monitor spectrum, NFE is also required to meet the 1 Hz pulse repetition frequency (prf) test case for the quasi-peak detector (QPD) and for the 5 Hz prf test case for the RMS-avg detector.

Power requirements	
Voltage and frequency (nominal)	100 to 120 V, 50/60/400 Hz 220 to 240 V, 50/60 Hz
Power consumption	
– On	450 W maximum
– Standby	20 W
Display	
Resolution	1024 x 768, XGA
Size	213 mm (8.4 in.) diagonal (nominal)
Data storage	
Internal	≥ 80 GB (nominal) (removable solid state drive)
External	Supports USB 2.0 compatible memory devices
Weight (without options)	
Net	24 kg (52 lbs) (nominal)
Shipping	36 kg (79 lbs) (nominal)
Dimensions	
Height	177 mm (7.0 in)
Width	431 mm (17.0 in)
Length	535 mm (21.0 in)
Calibration cycle	
The recommended calibration cycle is one year; calibration services are available through Keysight service centers	

Inputs and Outputs

Front panel

RF input

– RF Input 1 Connector	Type-N female, 50 Ω (nominal) (standard)
	3.5 mm male, 50 Ω (Opt C35)
– RF Input 2 Connector	2.4 mm male, 50 Ω (Option 544 only)

External Mixing (Option EXM)

– Connection port	SMA, female
– Connector	50 Ω, nominal
– Impedance	Triplexed for LO output, IF input, and mixer bias
– Functions	± 10 mA in 10 μA step
– Mixer bias range	
– IF input center frequency	322.5 MHz (note - please use the proper <= sign)
– IF BW path <= 25 MHz	300 MHz
– 85 MHz BW IF path	
– LO output frequency range	3.75 to 14.0 GHz

Probe power

– Voltage/current	+15 Vdc, ± 7% at 150 mA max (nominal)
	-12.6 Vdc, ± 10% at 150 mA max (nominal)

USB 2.0 ports

– Host (2 ports)	Compatible with USB 2.0
– Standard	USB Type-A female
– Connector	
– Output current	0.5 A (nominal)

Headphone jack

– Connector	Miniature stereo audio jack 3.5 mm
-------------	------------------------------------

Rear panel

10 MHz out

– Connector	BNC female, 50 Ω (nominal)
– Output amplitude	≥ 0 dBm (nominal)
– Frequency	10 MHz × (1+ frequency reference accuracy)

Ext Ref In

– Connector	BNC female, 50 Ω (nominal)
– Input amplitude range	-5 to 10 dBm (nominal)
– Input frequency	1 to 50 MHz (nominal)
– Frequency lock range	± 5 × 10 ⁻⁶ of specified external reference input frequency

Trigger 1 and 2 inputs

– Connector	BNC female
– Impedance	> 10 kΩ (nominal)
– Trigger level range	-5 to 5 V

Trigger 1 and 2 outputs

– Connector	BNC female
– Impedance	50 Ω (nominal)
– Level	0 to 5 V (CMOS)

Rear panel (continued)

Monitor output	
– Connector	VGA compatible, 15-pin mini D-SUB
– Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
– Resolution	1024 x 768
Noise source drive +28 V (pulsed)	
– Connector	BNC female
SNS Series noise source	For use with Keysight Technologies' SNS series noise sources
Analog out	
– Connector	BNC female (used by Option YAS)
USB 2.0 ports	
– Host (4 ports)	Compatible with USB 2.0
– Standard	USB Type-A female
– Connector	0.5 A (nominal)
– Output current	
– Device (1 port)	Compatible with USB 2.0
– Standard	USB Type-B female
– Connector	
GPIB interface	
– Connector	IEEE-488 bus connector
– GPIB codes	SH1, AH1, T6, SR1, RL1, PPO, DC1, C1, C2, C3, C28, DT1, L4, C0
– GPIB mode	Controller or device
LAN TCP/IP interface	
– Standard	1000Base-T
– Connector	RJ45 Ethertwist
Aux I/O connector	
– Connector	25-pin D-SUB

I/Q Analyzer

Resolution bandwidth (spectrum measurement)

Range	
– Overall	100 mHz to 3 MHz
– Span = 1 MHz	50 Hz to 1 MHz
– Span = 10 kHz	1 Hz to 10 kHz
– Span = 100 Hz	100 mHz to 100 Hz

Window shapes

Flat top, Uniform, Hanning, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB)

Analysis bandwidth

Standard	10 Hz to 10 MHz
Option B25	10 Hz to 25 MHz
Option B85	10 Hz to 85 MHz

IF frequency response (standard 10 MHz IF path)

IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Max. error	RMS (nominal)
≤ 3.6	≤ 10	NA	± 0.40 dB	0.04 dB
3.6 < f ≤ 26.5	≤ 10	On		0.25 dB
f > 26.5	≤ 10	On		0.35 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Peak-to-peak (nominal)	RMS (nominal)
0.02 < f ≤ 3.6	≤ 10	NA	0.4°	0.1°
3.6 < f ≤ 26.5	≤ 10	On	1.0°	0.2° (nom)

Data acquisition (10 MHz IF path)

Time record length

– IQ analyzer	4,000,000 IQ sample pairs
---------------	---------------------------

Sample rate at ADC

100 MSa/s

ADC resolution

16 bits

I/Q Analyzer – Option B25

25 MHz analysis bandwidth

IF frequency response

IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Max. error	RMS (nominal)
≤ 3.6	10 to ≤ 25	NA	± 0.45 dB	0.051 dB
3.6 < f ≤ 44	10 to ≤ 25	On		0.45 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Peak-to-peak (nominal)	RMS (nominal)
0.02 ≤ f < 3.6	≤ 25	NA	0.6°	0.14°
3.6 ≤ f ≤ 26.5	≤ 25	On	4.5°	1.2°

Data acquisition (25 MHz IF path)

Time record length (IQ pairs)

– IQ analyzer	4,000,000 IQ sample pairs
---------------	---------------------------

– 89600 VSA software	Data packing
----------------------	--------------

32-bit

64-bit

Memory

536 MSa

268 MSa

2 GB

Sample rate at ADC

100 MSa/s

ADC resolution

16 bits

I/Q Analyzer – Option B85

85 MHz analysis bandwidth

IF frequency response

IF frequency response (20 to 30 °C)

Center freq. (GHz)	Span (MHz)	Microwave preselector	Relative to center frequency	Typical	RMS (nominal)
0.15 ≤ f < 3.6	≤ 85	NA	± 0.6 dB	± 0.17 dB	0.05 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center freq. (GHz)	Span (MHz)	Microwave preselector	Peak-to-peak (nominal)	RMS (nominal)
0.03 ≤ f < 3.6	≤ 85	NA	1.6°	0.54°

Dynamic range

SFDR (Spurious-free dynamic range)

- Signal frequency and spurious response anywhere within 85 MHz BW

-76 dBc, nominal

Full scale (ADC clipping)

Default settings, signal at CF (IF gain = Low; IF gain offset = 0 dB)

- Band 0 -8 dBm mixer level, nominal
- Band 1 through 4 -7 dBm mixer level, nominal

High gain setting, signal at CF (IF gain = High)

- Band 0 -18 dBm mixer level nominal, subject to gain limitations
- Band 1 through 4 -17 dBm mixer level nominal, subject to gain limitations

Effect of signal frequency ≠ CF Up to ± 3 dB, nominal

Data acquisition (85 MHz IF path)

Time record length

- IQ analyzer 4,000,000 IQ sample pairs
- 89600 VSA software Data packing
 - 32-bit
 - 64-bit
- Length (IQ sample pairs) 536 MSa (2^{29} Sa) 268 MSa (2^{28} Sa) 2 GB total memory
- Length (time units) Samples/(span x 1.25)

Sample rate

- At ADC 400 Ms/s
- IQ pairs Span dependent

ADC resolution 14 bits

Real-Time Spectrum Analyzer (RTSA) ¹

Option RT1

Real-time analysis

Real-time analysis bandwidth

- Option RT1
 - Up to 85 MHz \leq 3.6 GHz
 - Up to 40 MHz $>$ 3.6 GHz

Minimum signal duration with 100% probability of intercept (POI) at full amplitude accuracy

- Option RT1 3.7 μ s

Minimum acquisition time 104 μ s Spectrogram view only

FFT rate 292,969/s

Supported triggers Level, Level with time qualified (TQT), Line, External, RF burst, Frame, Frequency mask (FMT), FMT with TQT

1. For additional RTSA specifications, please refer to Option RT1 Chapter in the MXE Signal Analyzer specifications guide (part number: N9038-90010).

Related Literature

Keysight MXE EMI receiver

Publication title	Publication number
MXE EMI Receiver, <i>Configuration Guide</i>	5990-7419EN
MXE EMI Receiver, <i>Brochure</i>	5990-7422EN

Learn more at: www.keysight.com

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

www.keysight.com/find/contactus

